
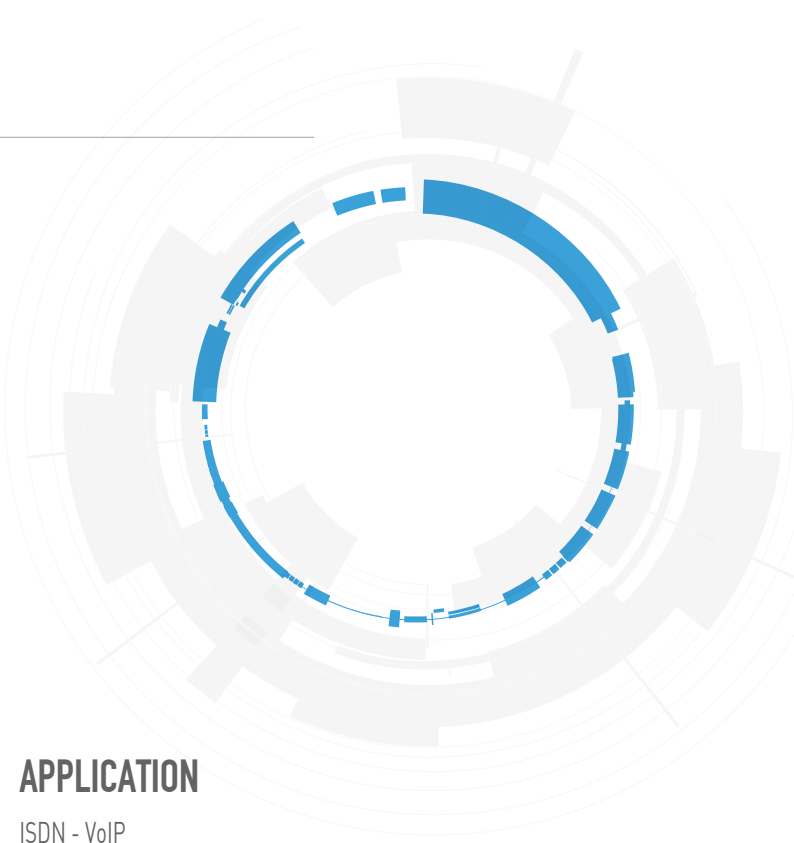


## CAT.6 F/UTP 250 MHZ

EMEK KABLO CAT.6 F/UTP 250 MHZ



## KULLANIM ALANLARI

ISDN - VoIP  
 TOKEN RING 4/16 Mbit - 100 VG-AnyLAN  
 TP-PMD / TP-DDI - ATM 155, 622,1200 Mbit  
 ETHERNET: 10 Base T, 100 Base Tx, 100 Base T4, 1000 Base T

## KABLO YAPISI

İletken	Mono tavlı bakır <b>AWG24</b> 0,52/0,53/0,55 <b>AWG23</b> 0,56/0,57
İzolasyon	PO - Poliolenfin
Separatör	PO - Poliolenfin
Toprak Teli	Mono kalaylı bakır AWG26
Ekran	Al/PET folyo-%100 kapama
Kılıf	PVC veya LSZH - 5024 Mavi RAL
Standartlar	IEC 61156-5 / EN 50288-5-1

## TEKNİK ÖZELLİKLER

Direnç (max)	95 Ω / km
Empedans	1-100 MHz 100 ± 15 Ω / 100-250 MHz 100 ± 20 Ω
Kapasite	Nominal 52 pF/m
Yayıma Hızı	69% c

## APPLICATION

ISDN - VoIP  
 TOKEN RING 4/16 Mbits - 100 VG-AnyLAN  
 TP-PMD/TP-DDI - ATM 155, 622,1200 Mbits  
 ETHERNET: 10 Base T, 100 Base Tx, 100 Base T4, 1000 Base T

## CONSTRUCTION

Conductor	Solid annealed copper <b>AWG24</b> 0,52/0,53/0,55 <b>AWG23</b> 0,56/0,57
Insulation	PO - Polyolefin
Separator	PO - Polyolefin
Drain Wire	Solid tinned copper AWG26
Shielding	Al/PET foil - 100% coverage
Jacket	PVC or LSZH - Blue RAL 5024
Standards	IEC 61156-5 / EN 50288-5-1

## TECHNICAL SPECIFICATIONS

Resistance (max)	95 Ω / km
Impedance	1-100 MHz 100 ± 15 Ω / 100-250 MHz 100 ± 20 Ω
Capacitance	Nominal at 52 pF/m
Velocity Of Propagation	69% c

MHz	INSERTION LOSS (dB/100 m)	NEXT (dB/100 m)	ACR-N (dB/100 m)	PSNEXT (dB/100 m)	ACR-F (dB/100 m)	PSACR-F (dB/100 m)	RETURN LOSS (dB/100 m)
1	2.0	74.3	72.3	72.3	67.8	64.8	20.0
4	3.8	65.3	61.5	63.3	55.8	52.8	23.0
10	6.0	59.3	53.3	57.3	47.8	44.8	25.0
16	7.6	56.2	48.6	54.2	43.7	40.7	25.0
25	9.5	53.3	43.8	51.3	39.8	36.8	24.3
31.25	10.7	51.9	41.2	49.9	37.9	34.9	23.6
100	19.8	44.3	24.5	42.3	27.8	24.8	20.1
200	29.0	39.8	10.8	37.8	21.8	18.8	18.0
250	32.8	38.3	5.5	36.3	19.8	16.8	17.3